


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

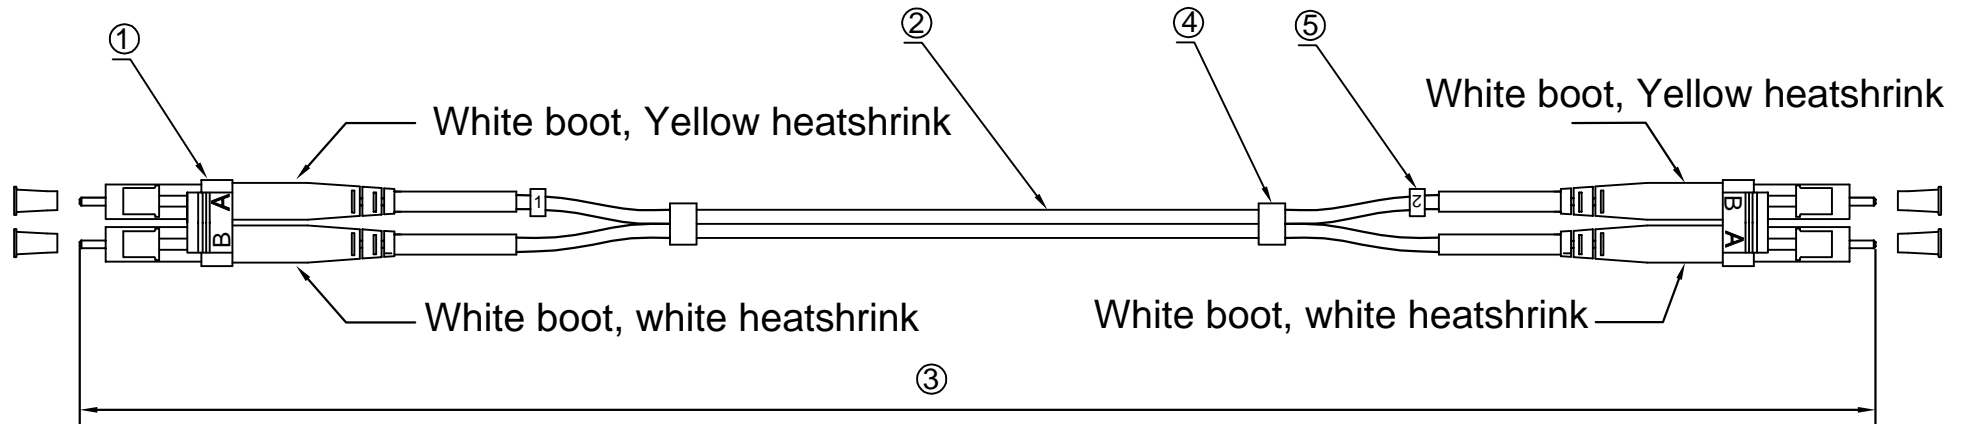

Specification:

- 1.Connector Type: LC/PC singlemode
- 2.Cable Type:
Zipcord cable, ϕ 1.8mm. 9/125um , singlemode,
Cable Jacket : Yellow color, LSZH material
- 3.Length : xM
- 4.Shrink Tube
- 5. Cable Marker

Performance:

- a. Insertion Loss :<0.3 dB
- b. Return loss > 50 dB
- c. Ferrule End-face Radius : $10 < R < 30$ mm
- d. Apex Offset: < 50um
- e. Increase in insertion loss after 500 mating:0.2 dB Max.
- f. Operation Temperature :-20° to +70°
- g. Storage Temperature :-40° to +80°

Part Number	Length
LCLC-5S	5M
LCLC-7S	7M
LCLC-xS	xM

UNIT		TITLE	DELTA CO Fiberkablage LC - LC, duplex, singlemode,XXmeters		VERSION	1.0
mm		P/N.	DRAWN BY		Leinazi	
MATERIAL		CHECK BY		Michael		
SCALE		PAGE	1/1	APPROVAL BY		Johnson

unless otherwise stated
Tolerances
mm XXX.XX ±0.3
XX.XX ±0.2
X.XX ±0.1
angular ±2°