


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

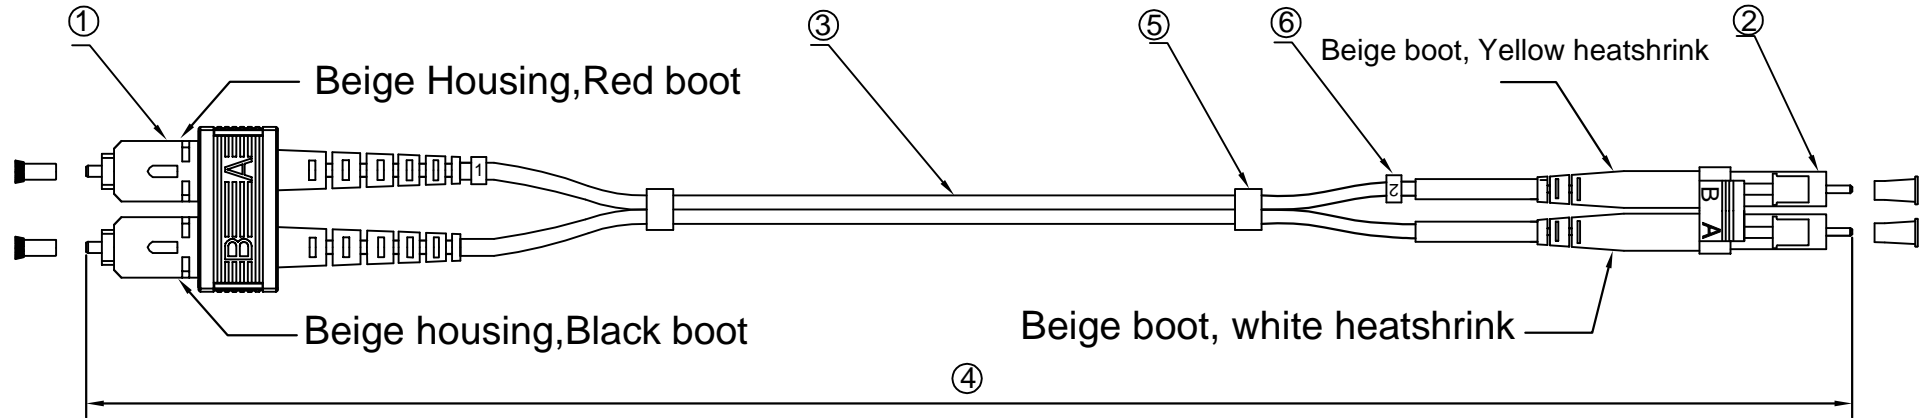

Specification:

- 1.Connector Type: SC/PC Multimode
- 2.Connector Type: LC/PC Multimode
- 3.Cable Type:
Zipcord cable, ϕ 1.8mm. 50/125um OM3, Multimode,
Cable Jacket : Aqua color, LSZH material
- 4.Length : xM
- 5.Shrink Tube
- 6.Cable Marker

Part Number	Length
LCSC-60	0.5M
LCSC-61	1M
LCSC-62	2M
LCSC-63	3M
LCSC-65	5M
LCSC-67	7M
LCSC-610	10M
LCSC-615	15M
LCSC-620	20M
LCSC-6xx	xxM

Performance:

- a. Insertion Loss :<0.3 dB
- b. Increase in insertion loss after 500 mating:0.2 dB Max.
- c. Operation Temperature :-20° to +70°
- d. Storage Temperature :-40° to +80°

UNIT		TITLE	VERSION	
mm		DELTA CO OM3 fiberkabel LC - SC, duplex, multimode, 50/125, XXmeters	1.0	
unless otherwise stated Tolerances mm XXX.XX ±0.3 XX.XX ±0.2 X.XX ±0.1 angular ±2°		P/N.	DRAWN BY	Leinazi
		MATERIAL	CHECK BY	Michael
		SCALE	PAGE 1/1	APPROVAL BY Johnson